


# MODULA WALL ELEMENT CURVED MODEL 9388.045

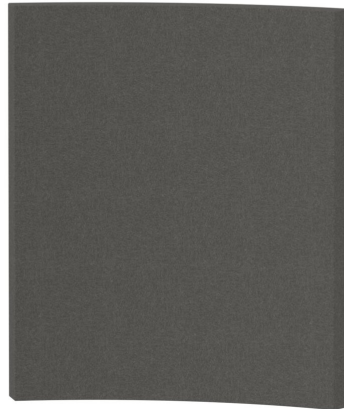

## STANDARD VERSION

Sturdy wooden frame construction with fabric covering, including pre-assembled fasteners.

Wall element bent at an angle of 45°.

Note: Can only be combined with matching elements of the MODULA series.

## OPTIONS

- Cover fabric ARTIFICIAL LEATHER B1 (price group 4)
- Electric set with 2x 230 V socket insert
- Elektroset mit 2x USB Port
- Electric set with 1x 2320 V socket insert and 1x USB port

## STANDARD

FEMB level:2017 (Level 3)

GS-zertifiziert gem. DIN EN 16139, DIN EN 1023-1, DIN EN 1023-2, DIN EN 16121, DIN EN 15372

bei Bezugstoffen B1:

höchste zertifizierte Brandschutzsicherheit nach DIN 66084 P-a (Papierkissentest)

## TECHNICAL SPECIFICATIONS

TOTAL WIDTH	115 cm
TOTAL HEIGHT	130 cm
TOTAL DEPTH	11 cm
WEIGHT	31 kg

Our range of materials and colors can be found in the A2S material overview.



A2S-Furnishing Systems Ltd.  
ASS-Einrichtungssysteme GmbH  
info@a2s.com  
WWW.A2S.COM

# MODULA WALL ELEMENT CURVED

## MODEL 9388.045



### BENEFITS/SPECIALS



Optimum barrier against noise on both sides



Optionally with 230 V socket insert and/or USB port, cable lead 2 m



Tool-free assembly due to pre-assembled fasteners



Can be combined with matching seating elements from the MODULA series

### FABRIC PROPERTIES

#### FLEECE Price group 1

100% polyester | flame retardant BS 5852:Part1:1979 (cigarette) | 402 g/m<sup>2</sup> | 100,000 Martindale tours | linting 4 | ÖKO-Tex 100

#### WOOL Price group 3

100% wool | flame retardant according to EN 1021 1&2 | 460 g/m<sup>2</sup> +/-5% | 35,000 Martindale tours | linting 4 | tested for harmful substances

#### PROTEX Price group 3

surface 100% vinyl / fabric 100% polyester | flame retardant according to EN 1021 1&2, DIN 4102 B2 | 685 g/m<sup>2</sup> | 300,000 Martindale tours | no linting | wipeable with soap and water, water repellent, antibacterial, anti-static, stain resistant, resistant to blood and urine, mold resistant backing and surface, resistant to disinfectants

#### ARTIFICIAL LEATHER B1 Price group 4

85% PVC compound, 15% cotton knit | flame retardant according to EN 1021 1&2, DIN 4102 B1 | weight 780 +/-50 g/m<sup>2</sup> | 75,000 Martindale tours | no linting | tested for harmful substances | resistant to blood and urine, resistant to disinfectants

#### PROTEX B1 price group 4

surface 100% vinyl / fabric 100% cotton | flame retardant according to EN 1021 1&2, DIN 4102 B1 | 760 g/m<sup>2</sup> | 300.000 tours Martindale | no linting

**SPECIAL PROPERTIES:** PERMABLOK3® - protection against germs, abrasion and stains: Antibacterial, antifungal, stain resistant, sulfide stain resistant, anti-fungal protection - mildew resistant backing and surface | disinfectant resistant, easy cleaning - wipeable with soap and water | antistatic surface

**Tested to:** ISO206B02 7/8 UV resistance | ISO 18184 & ISO 21702 virus-free surface to reduce corona virus | ISO 22196 for bacteria-free surface | ISO 16000 indoor air emission class A+

**Tested for:** Plasticizers and harmful substances - material requirements of toy standards EN 71-3 Safety of toys (migration of certain elements) and 2005/84/EC (phthalates in toys and childcare articles)